




## BEARING MANUFACTURING DE MEXICO, S.A.D...

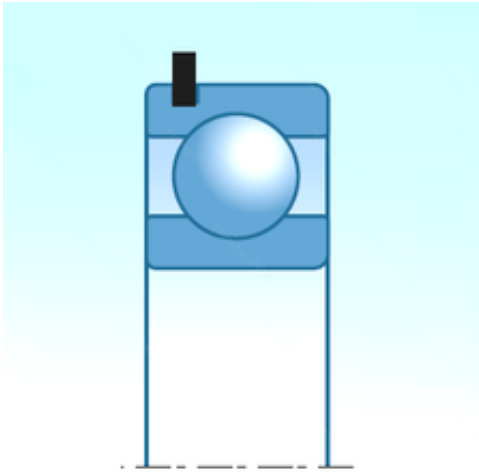

6016ZZNR Bearing 2D drawings and 3D CAD models

80,000 mm x 125,000 mm x 22,000 mm NTN  
6016ZZNR deep groove ball bearings

Bearing No. 6016ZZNR

Size	80x125x22 mm
Bore Diameter	80,000 mm
Outer Diameter	125,000 mm
Width	22,000 mm
d	80,000 mm
D	125,000 mm
B	22,000 mm
C	22,000 mm
Category	Single Row Ball Bearings
Inventory	0.0
Manufacturer Name	NTN
Minimum Buy Quantity	N/A
Weight / Kilogram	0.893
EAN	4547359550252
Product Group	B00308
Enclosure	2 Metal Shields
Precision Class	ABEC 1   ISO P0
Maximum Capacity / Filling Slot	No
Rolling Element	Ball Bearing
Snap Ring	Yes
Internal Special Features	No
Cage Material	Steel
Internal Clearance	C0-Medium
Inch - Metric	Metric
Long Description	80MM Bore; 125MM



## BEARING MANUFACTURING DE MEXICO, S.A.D...

	Outside Diameter; 22MM Outer Race Diameter; 2 Metal Shields; Ball Bearing; ABEC 1   ISO P0; No Filling Slot; Yes Snap Ring; No Internal Special Features
Category	Single Row Ball Bearing
UNSPSC	31171504
Harmonized Tariff Code	8482.10.50.68
Noun	Bearing
Keyword String	Ball
Manufacturer URL	<a href="http://www.ntnamerica.com">http://www.ntnamerica.com</a>
Manufacturer Item Number	6016ZZNR/2A
Weight / LBS	1.87
Outside Diameter	4.921 Inch   125 Millimeter
Outer Race Width	0.866 Inch   22 Millimeter
Bore	3.15 Inch   80 Millimeter
bore diameter:	80 mm
precision rating:	ISO Class 0
outside diameter:	125 mm
finish/coating:	Uncoated
overall width:	22 mm
bearing material:	High Carbon Chrome Steel
bore type:	Round
cage material:	Steel
closure type:	Double Shielded
inner ring width:	22 mm
row type & fill slot:	Single Row Non-Fill Slot
outer ring width:	22 mm
snap ring included:	With Snap Ring
maximum rpm (grease):	5300 rpm
internal clearance:	CN
fillet radius:	1.1 mm



## BEARING MANUFACTURING DE MEXICO,S.A.D...

operating temperature range:	-40 to 120 ° C
maximum rpm:	6200 RPM
dynamic load capacity:	47500 N
series:	60
static load capacity:	40000 N
manufacturer product page:	<a href="#">Click here</a>